



Chemical Solutions

Whether it is for swimming pool chemicals, motor lubricants or household detergents such as bleach and turpentine, we have it covered. Our range has been specially designed for the safe containment of chemicals. The convenient handles and anti-glug features help to prevent spillage. The wall thickness is dependent on the application to prevent panelling and permeation. Choose from our generic range or let our design experts create something unique for your brand.

Decoration to stand out:

- IML (In-Mould Labelling)
- Self-adhesive Labelling
- Screen Printing
- Embossing

Colours:

- Available in white, natural and clear
- We can also match your colour requirement

Key Benefits:


- Optimised for storage, handling and transportation
- Tamper evident protection
- Lid re-closes securely to prevent wastage
- Easy to pour or decant with convenient handle and anti-glug function to prevent spillage
- Various wall thickness options to suit specific applications
- Specialist closure features available including chemical resistant sealing rings, induction heat seals and osmosis caps

We also offer:

- Customised designs
- Fluorination for corrosive and solvent based products
- Virgin or recycled HDPE material
- Relevant testing services
- UN Approved packs

Specialist Closures:

- A** Trigger Spray
- B** Tap Cap
- C** Spout

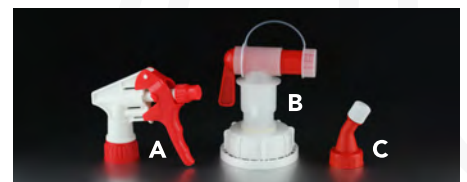

Chemical Solutions


| Range | Sizes | Closures | Special Features |
|---|---------------|--|--|
| P Range | | | |
| Standard or Anti-Glug | 1, 2 & 5 L | 38 mm Neck: • Industrial • Induction Heat Seal • Osmosis • Child Resistant | Convenient handle and anti-glug easy pour function. Range of weights depending on application.* |
| PX Anti-Glug | 3 L | | |
| General Purpose Range | | | |
| Jars | 500 g & 1 kg | 84 mm Jar Lid | Great range of functional closures with sprays and spouts. |
| Shaker | 500 g | 50 mm Sprinkle Cap | |
| General Purpose, Handled, Waisted and Solvent Bottles | 1 L | 28 / 38 mm Neck: • Industrial • Child Resistant | |
| Drum Range | | | |
| Square | 20 & 25 L | 56 mm Neck: • Industrial • Osmosis • Tap Cap • Sealing Ring | Robust, compact, stackable. Range of weights depending on application.* |
| Rectangular | 10, 20 & 25 L | | |

* We can advise optimal weight depending on the density, UV sensitivity, filling temperature and storage of contents.

P Range



General Purpose Range

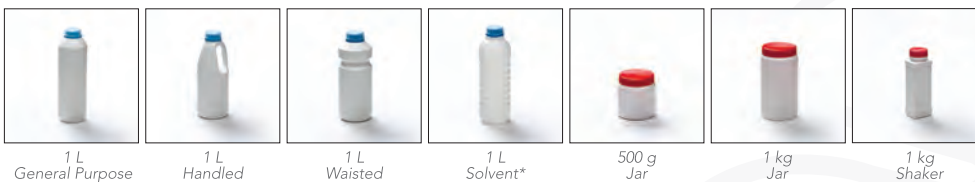

Drum Range



*Available with 38mm neck only